
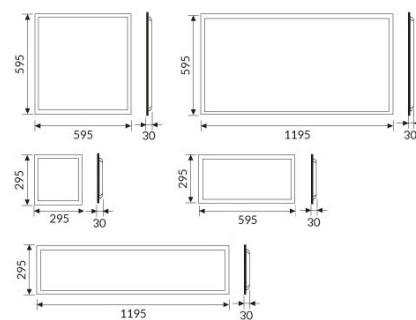



ABSENT ESSENTIAL DPL

It represents a high-quality, essential and efficient back-lighting solution

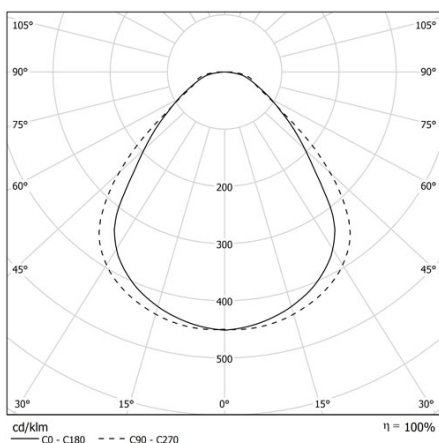

Plasterboard hole / foro cartongesso:
275X275mm
575X575mm
575X275mm
1170X270mm
1170X570mm

CODE		FLUX	SIZE	CERTIFICATIONS
41DPL36K4	36W 4000K	4140lm	595x595mm	CE IP40 

Optics

Diffuser in Diamond Prism LED (DPL) Technology with UGR<19 for ambient with display screen equipment.

Specifications

CRI>94;
R9: 69;
McAdams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0 in accordance with EN62471:2009

Body

Steel plate body with epoxy powder coating.

Legal reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97