

Performance of grid-connected PV

PVGIS-5 estimates of solar electricity generation:


Provided inputs:

Latitude/Longitude: 50.495,15.516
Horizon: Calculated
Database used: PVGIS-SARAH2
PV technology: Crystalline silicon
PV installed: 13.95 kWp
System loss: 14 %


Simulation outputs

Slope angle: 10 °
Azimuth angle: -85 °
Yearly PV energy production: 12732.51 kWh
Yearly in-plane irradiation: 1153.49 kWh/m²
Year-to-year variability: 543.01 kWh
Changes in output due to:
Angle of incidence: -4.1 %
Spectral effects: 1.43 %
Temperature and low irradiance: -5.41 %
Total loss: -20.87 %


Outline of horizon at chosen location:

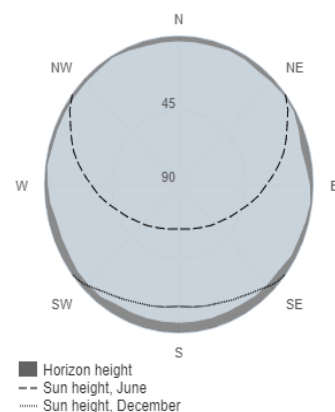

Monthly energy output from fix-angle PV system:

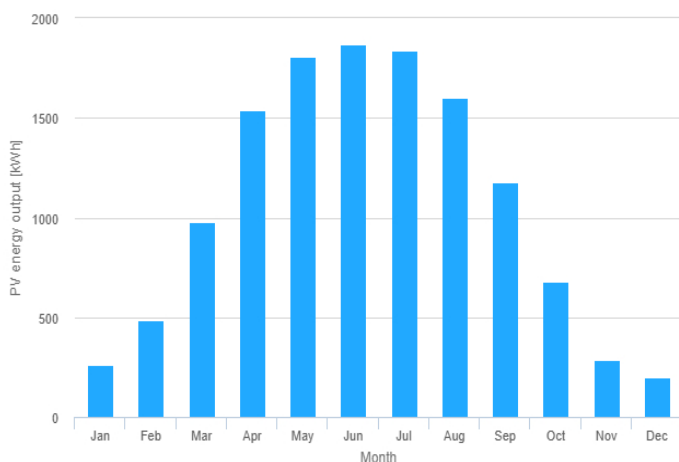

Monthly in-plane irradiation for fixed-angle:

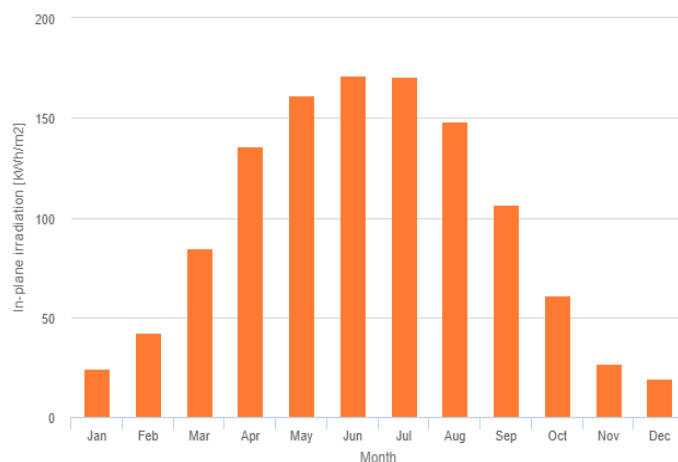

Monthly PV energy and solar irradiation

Month	E_m	H(i)_m	SD_m
January	264.3	24.4	53.4
February	488.1	42.6	96.2
March	979.3	84.9	123.6
April	1538.9	135.7	211.9
May	1806.2	161.5	241.1
June	1871.2	171.4	169.5
July	1839.8	170.9	180.9
August	1603.6	148.0	151.2
September	1178.8	106.3	119.7
October	677.6	61.3	110.8
November	286.8	27.1	42.3
December	198.1	19.4	25.8

E_m: Average monthly electricity production from the defined system [kWh].

H(i)_m: Average monthly sum of global irradiation per square meter received by the modules of the given system [kWh/m²].

SD_m: Standard deviation of the monthly electricity production due to year-to-year variation [kWh].