

Performance of grid-connected PV

PVGIS-5 estimates of solar electricity generation:


Provided inputs:

Latitude/Longitude: 50.496,15.501
Horizon: Calculated
Database used: PVGIS-SARAH2
PV technology: Crystalline silicon
PV installed: 15.3 kWp
System loss: 14 %


Simulation outputs

Slope angle: 10 °
Azimuth angle: 24 °
Yearly PV energy production: 14850.24 kWh
Yearly in-plane irradiation: 1220.32 kWh/m²
Year-to-year variability: 655.88 kWh
Changes in output due to:
Angle of incidence: -3.67 %
Spectral effects: 1.45 %
Temperature and low irradiance: -5.37 %
Total loss: -20.46 %


Outline of horizon at chosen location:

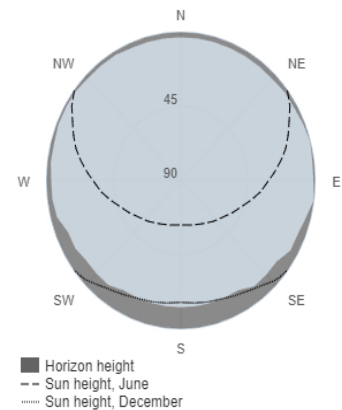

Monthly energy output from fix-angle PV system:

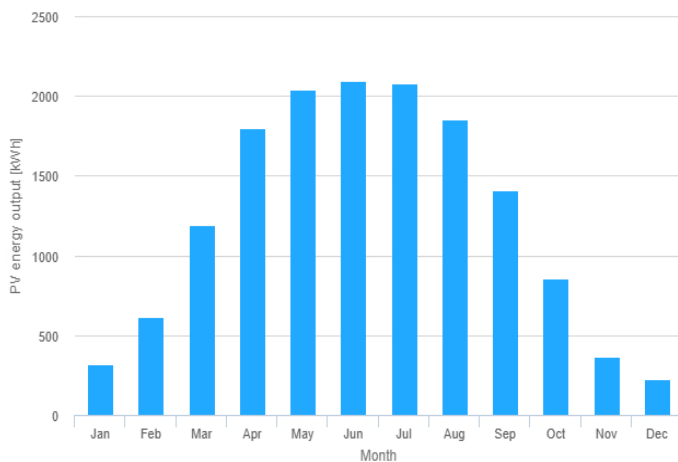

Monthly in-plane irradiation for fixed-angle:

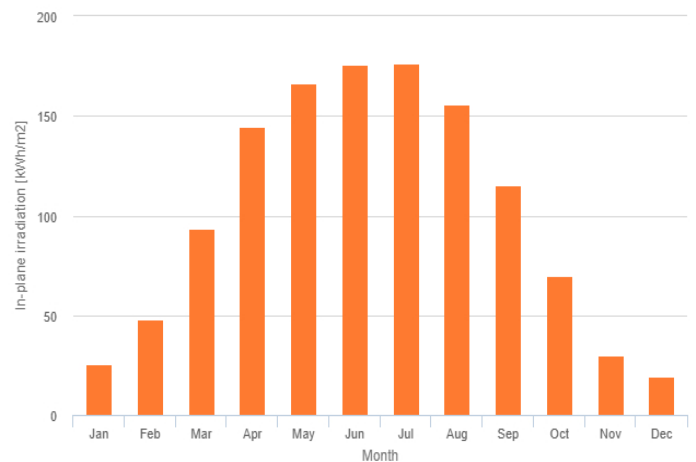

Monthly PV energy and solar irradiation

Month	E_m	H(i)_m	SD_m
January	316.8	25.6	70.3
February	615.9	47.9	144.6
March	1190.7	93.6	166.2
April	1798.3	144.7	261.3
May	2041.4	166.6	263.3
June	2096.5	175.4	193.5
July	2079.7	176.4	192.5
August	1853.3	156.0	173.6
September	1407.6	115.4	157.0
October	859.1	69.6	168.8
November	364.3	30.1	64.1
December	226.6	19.2	32.4

E_m: Average monthly electricity production from the defined system [kWh].

H(i)_m: Average monthly sum of global irradiation per square meter received by the modules of the given system [kWh/m²].

SD_m: Standard deviation of the monthly electricity production due to year-to-year variation [kWh].