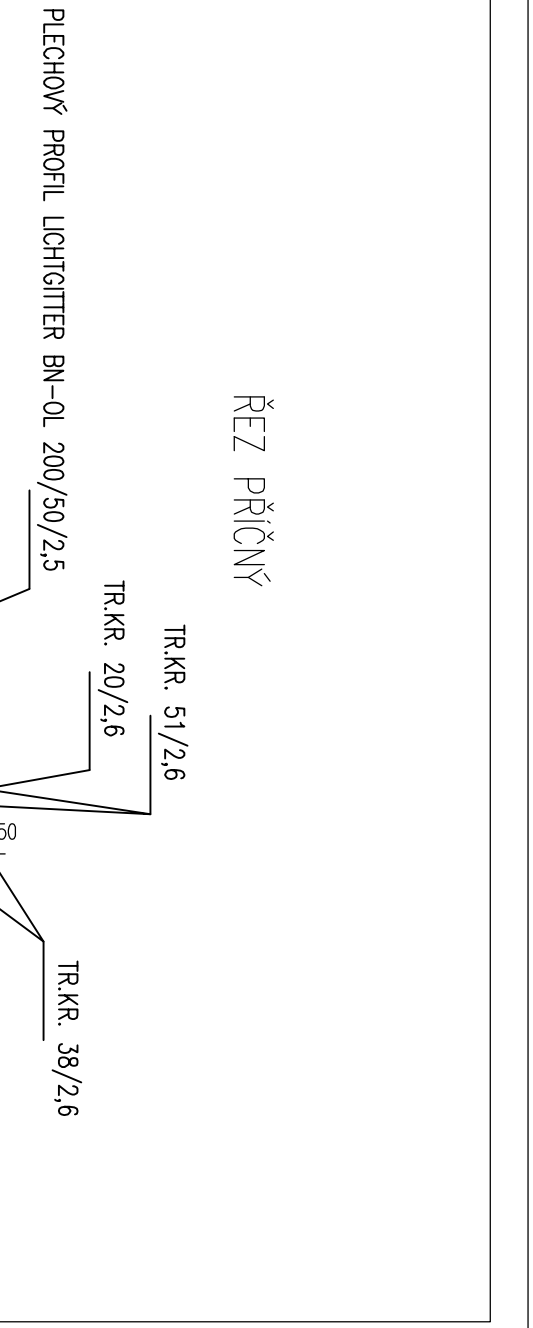



[illegible]

Technical drawing of a mechanical assembly, likely a bracket or support structure, showing dimensions and labels:

- Dimensions:**
 - 402 (top horizontal distance)
 - 50 (small horizontal distance)
 - 110 (small horizontal distance)
 - 900 (large horizontal distance)
 - 750 (horizontal distance)
 - 678 (horizontal distance)
 - 150 (small horizontal distance)
 - 1104 (total horizontal distance)
- Labels:**
 - TR.KR. 51/2,6** (top right)
 - TR.KR. 20/2,6** (middle right)
 - TR.KR. 38/2,6** (bottom right)
 - TR.Č.KR. ø 10** (bottom center)
 - TR.KR. 44,5/2,6** (bottom center)
 - P 100/4** (bottom left)
 - P 120/6** (bottom left)
 - P 50/5** (middle left)
 - TR.KR. 76/4** (middle left)
 - P 5** (top left)

- 1 – SPOHNOČE ZABRÁDLO, RODITEL NA DÍLY DÍLOH, MAX. 5,5 m, KILONOVE, ULOŽENÍ SPOHNOČE NA POPOŘADÍ
- 2 – KONSTRUKCE ŽÁKOVÉ ZEMKOVY – DÍLY KONSTRUKCE VYHOŘELÉ ŽÁKOVÉ ZEMKOVY
- 3 – PLEČOVÉ PROFILY VYHOŘELÉ PROUDU RÁMPE POKROVKY PO NÁHRZENÍ NA POŽÁROVANOÚ DÍLAÚ.
- 4 – PROFIL VÁZANÉ SÁSTROBOVÁNÍ A KE SPOHNOČNÍ PRAKTOVY SÍSTEMOVÁNÍ PRÍPOČKAMI
- 5 – SÍLOVÉ OSLABÍ DO KALUŠE V BETONOVÝCH PRAKTOVÝCH
- 6 – VESKÉ ROZMĚRY OČERŤ NA STABEJ PO PŘEVODNÍ ŽÁKOVÉ
- 7 – ČÁSTI POD TĚLEM OPAŘITÍ ASALTOVÝM NÁTEBEM

NAVROVÁNO PODLE ČSN EN 1993-1-1
OCEL S235JR
METODA SVAŘOVÁNÍ 135 (ČSN EN ISO 4063)
STUPEŇ KVALITY ISO 5817-C

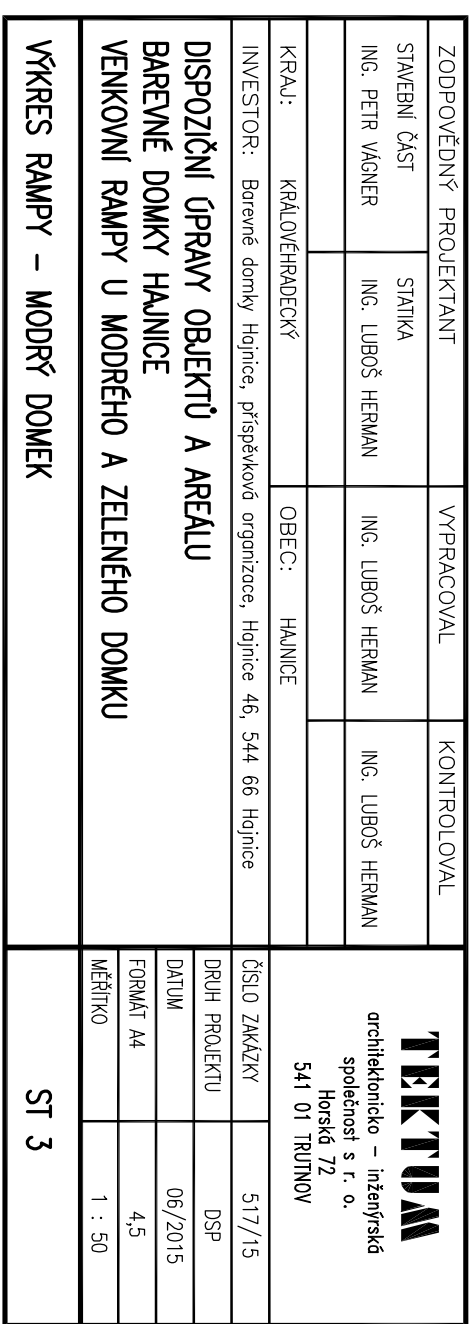

TATO DOKUMENTACE JE MAJETKEM FIRMY TEKUM s.r.o. TRUTNOV A NESMÍ BÝT UŽÍVÁNA, ŠÍŘENA KOPIEMI A UVEŘEJŇOVÁNA BEZ PŘEDCHOZÍHO PÍSEMNÉHO SOUHLASU